


PRODUCT SPECIFICATION SHEET

Product Name: 1-Piece Latching Cable Raceway & Accessories

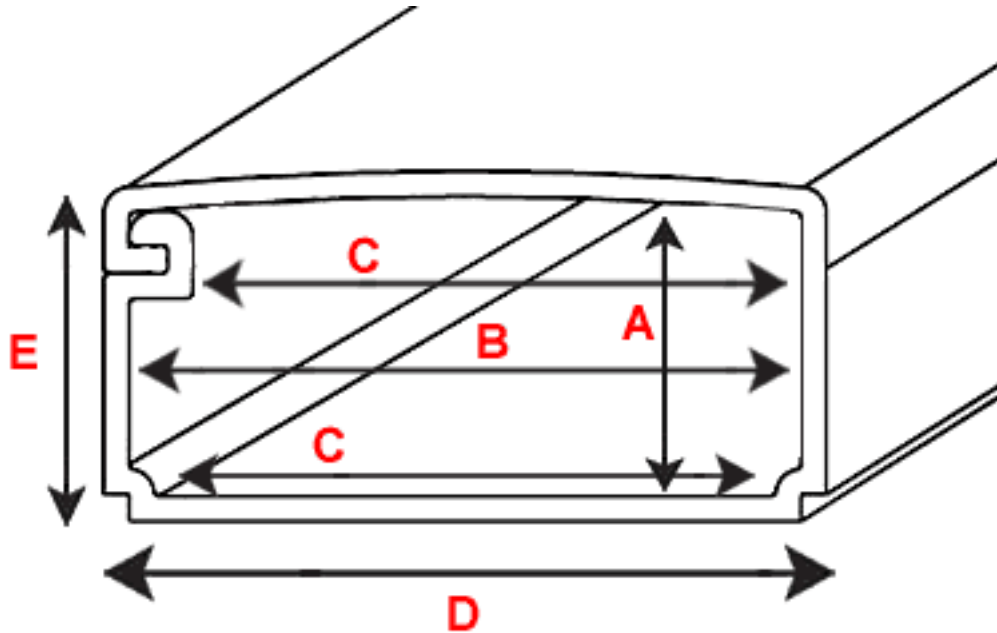

Model	375	500	1125
A - Inside Height	10mm - 0.39"	10mm - 0.39"	16mm - 0.63"
B - Channel Width	17mm - 0.67"	23mm - 0.91"	36mm - 1.42"
C - Channel Width	13mm - 0.51"	19mm - 0.75"	32mm - 1.26"
D - Total Width	20mm - 0.79"	25mm - 0.95"	38mm - 1.50"
E - Total Height	13mm - 0.51"	13mm - 0.51"	20mm - 0.79"
Wall Thickness	0.050"	0.050"	0.050"
Tape Width	0.500"	0.750"	1.000"

Technical Specifications

Model	375SR	500SR	1125SR
-------	-------	-------	--------

Raceway Fill Capacity Chart

Area (Sq. In.)	0.259	0.488	0.827
----------------	-------	-------	-------

Building Wire THHN

14 AWG	3	5	9
12 AWG	2	4	7
10 AWG	1	2	4

Technical Specifications

Model	375SR	500SR	1125SR
Signal Wire UL Style 1061 300 VOLT, 80 C*			
18 AWG	30	57	97
20 AWG	37	69	117
22 AWG	53	99	169
14 AWG	65	123	208
Twisted Pair 24 AUG*			
2 Pair	7	13	22
3 Pair	6	11	19
4 Pair, CAT 5	3	5	9
25 Pair	0	1	2
Twisted Pair (Shielded)*			
4 Pair, 24 AUG	2	4	7
25 Pair, 24 AUG	0	1	2
Type 1A, 22 AUG	1	1	2
Coax Cable (Max)*			
RG58/U	4	7	11
RG59/U RG62/U	2	4	7
RG6/U	2	3	6
Fiber Optic cable 62.5/125/900, PVC Jacket, OFNR*			
2 Strand	4	8	14
4 Strand	4	7	12
6 Strand	3	6	10

* Based on a 40% fill ratio