


PRODUCT SPECIFICATION SHEET

Product Name: Bumble Bee® Low Profile Cord Covers

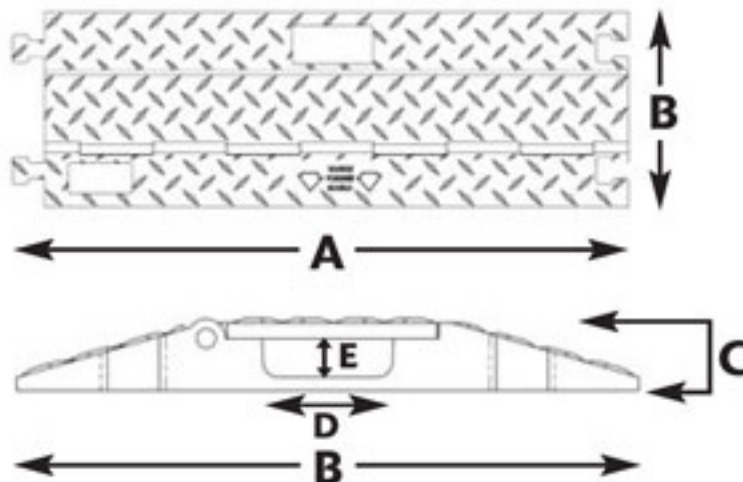

Part #	Length (A)	Width (B)	Height (C)	Weight	Channel Width (D)	Channel Height (E)
CP-BB1-075	36"	12"	1.3"	12 lbs	2.5"	0.75"
CP-BB2-075	36"	15"	1.3"	16 lbs	2.5"	0.75"
CP-BB3-075	36"	18"	1.3"	20 lbs	2.5"	0.75"

Specifications	
Operating Temperature	-40°F to 120°F (-40°C to 48°C)
Maximum Load Rating	21,000 lbs. per Axel
Material:	Durathane (Polyurethane)
Testing & Standards	
Hardness, Durometer:	ASTM D2240
Modulus:	ASTM D412
Ultimate Tensile Strength:	ASTM D412
Elongation:	ASTM D412
Tear Strength:	ASTM D624 Die C
Compression Set:	ASTM D395 Method B
Rebound:	ASTM D2632
Abrasion Resistance:	ASTM D1044 Tabor H22
Abrasion Resistance NBS:	ASTM D1630