


PRODUCT SPECIFICATION SHEET

Product Name: Corner Ducts Raceway

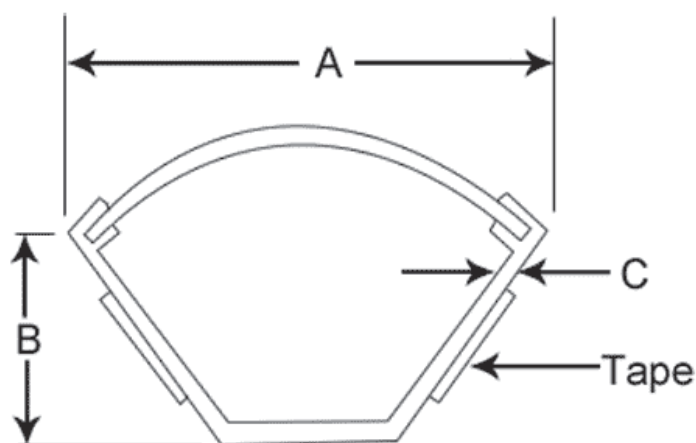

Model	A	B	C	Tape Width
1075	1.687"	0.563"	0.065"	0.500"
1150	2.187"	0.813"	0.065"	0.750"
1250	2.750"	1.094"	0.070"	0.750"

Raceway Fill Capacity Chart

	375RW	375SR	1075CD	500RW	500SR	1150CD	1125RW	1125SR	1250CD
Area (Sq. In.)	0.219	0.259	0.530	0.488	0.488	1.410	0.832	0.827	2.000

Building Wire THHN

14 AWG	2	3	6	5	5	15	9	9	22
12 AWG	2	2	4	4	4	11	7	7	16
10 AWG	1	1	2	2	2	6	4	4	9

Signal Wire UL Style 1061 300 Volt, 80 C*

18 AWG	26	30	62	57	57	165	97	97	234
20 AWG	31	37	75	69	69	200	118	117	283
22 AWG	45	53	108	99	99	287	170	169	408
14 AWG	55	65	133	123	123	355	209	208	503

Twisted Pair 24 AUG*

2 Pair	6	7	14	13	13	37	22	22	52
3 Pair	5	6	12	11	11	32	19	19	45
4 Pair, CAT 5	2	3	6	5	5	15	9	9	21
25 Pair	0	0	1	1	1	3	2	2	4

Raceway Fill Capacity Chart

	375RW	375SR	1075CD	500RW	500SR	1150CD	1125RW	1125SR	1250CD
--	-------	-------	--------	-------	-------	--------	--------	--------	--------

Twisted Pair Wire (Shielded)*

4 Pair, 24 AUG	2	2	4	4	4	11	7	7	16
25 Pair, 24 AUG	0	0	1	1	1	3	2	2	4
Type 1A, 22 AUG	1	1	1	1	1	4	2	2	6

COAX Cable (Max)*

RG58/U	3	4	7	7	7	19	11	11	27
RG59/U RG62/U	2	2	5	4	4	12	7	7	17
RG6/U	2	2	4	3	3	10	6	6	14

Fiber Optic Cable 62.5/125/900, PVC Jacket, OFNR*

2 Strand	4	4	9	8	8	23	14	14	33
4 Strand	3	4	8	7	7	21	12	12	30
6 Strand	3	3	6	6	6	16	10	10	23