


PRODUCT SPECIFICATION SHEET

Product Name: EAL Twister® 341® Tan Wire Connector

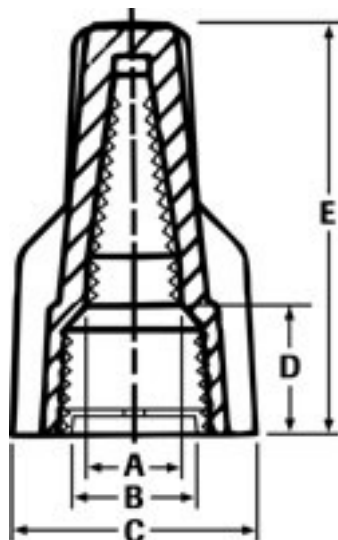

A	B	C	D	E
17/64"	29/64"	23/32"	23/64"	1-1/8"
7mm	11.5mm	18mm	9mm	28.5mm

UL File number E5238 and listed to 486C, CSA Certified to C22.2, complies with Federal Specification W-S-610E, and is in accordance with IEC Publications 998-2 and 998-2-4

Listed as a PRESSURE-TYPE wire connector on the following solid and/or stranded wire combinations:

2 to 6 #18	1 #22 w/2 to 5 #20	4 #18 w/1 #10
1 to 6 #16	1 #22 w/1 to 5 #18 or #16	1 #16 w/1 or 2 #10
1 to 5 #14	2 #22 w/1 4 #20, #18 or #16	2 #16 w/1 or 4 #14
1 to 3 #12	1 #18 w/1 or 2 #10	4 #16 w/1 #10
4 #12 solid	2 #18 w/1 to 3 #12	5 #16 w/1 #14
1 to 3 #10	2 #18 w/1 or 2 #10	

Specifications	
Purpose :	Wire Connection
Maximum Voltage :	600 Volts
Minimum and Maximum Wire Combination :	3
Maximum Wire Size :	8 AWG
Minimum Wire Size :	22 AWG