


PRODUCT SPECIFICATION SHEET


Product Name: Fast-Cure Adhesive-Style Connectors - Leviton

Connector Style	SC		LC		ST	
	Zirconia Ferrule		Zirconia Ferrule		Zirconia Ferrule	
	Multimode	Singlemode	Multimode	Singlemode	Multimode	Singlemode
Insertion Loss	< 0.2 dB Typical	< 0.15 dB Typical	< 0.2 dB Typical	< 0.15 dB Typical	< 0.4 dB Typical	< 0.2 dB Typical
Back Reflection	-25 dB Typical	-35 dB PC Polish	-25 dB Typical	-35 dB PC Polish	-25 dB Typical	-35 dB PC Polish
		-45 dB Super PC		-45 dB Super PC		-45 dB Super PC
		-55 dB Ultra PC		-55 dB Ultra PC		-55 dB Ultra PC
Connector Repeatability	< 0.1 dB	< 0.1 dB	< 0.2 dB	< 0.1 dB	0.1 dB Typical	< 0.1 dB Typical
Operating Environment	-40° C to 85° C	-40° C to 85° C	-40° C to 85° C	-40° C to 85° C	-40° C to 85° C	-40° C to 85° C
Temperature Cycling (Loss Variation)	Insertion Loss <0.1 dB	Insertion Loss <0.1 dB	Insertion Loss <0.2 dB	Insertion Loss <0.2 dB	Insertion Loss <0.1 dB	Insertion Loss <0.1 dB
	Return Loss <5 dB	Return Loss <5 dB	---	---	Return Loss <5 dB	Return Loss <5 dB
Vibration (Loss Variation)	Insertion Loss <0.1 dB	Insertion Loss <0.1 dB	Insertion Loss <0.2 dB	Insertion Loss <0.2 dB	Insertion Loss <0.1 dB	Insertion Loss <0.1 dB
	Return Loss <5 dB	Return Loss <5 dB	---	---	Return Loss <5 dB	Return Loss <5 dB
Cable Retention	> 15lbs	> 15lbs	> 15lbs	> 15lbs	> 15lbs	> 15lbs

Fast Cure LC Connector

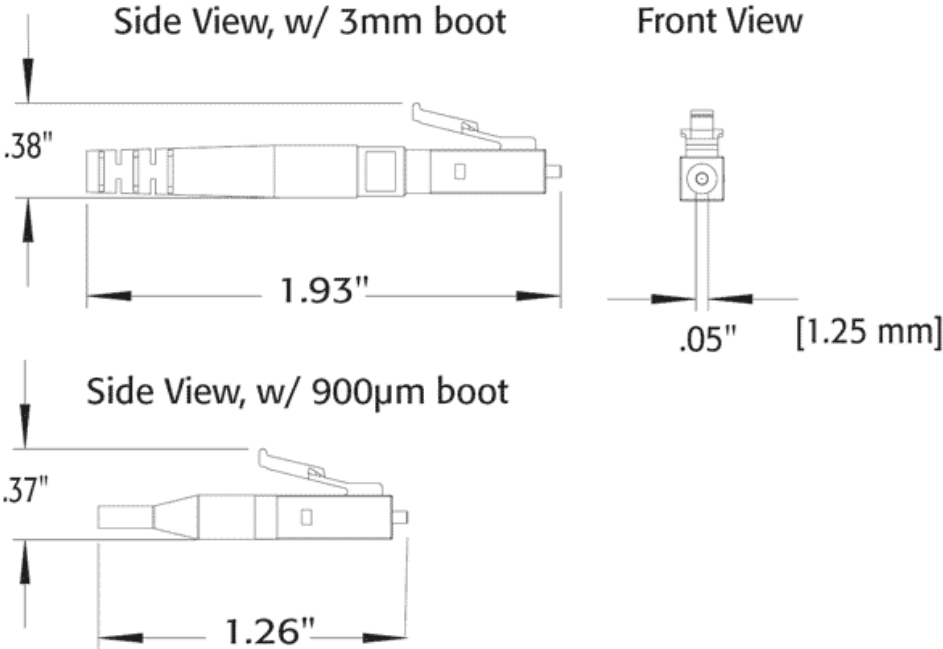

Fast Cure ST Connector

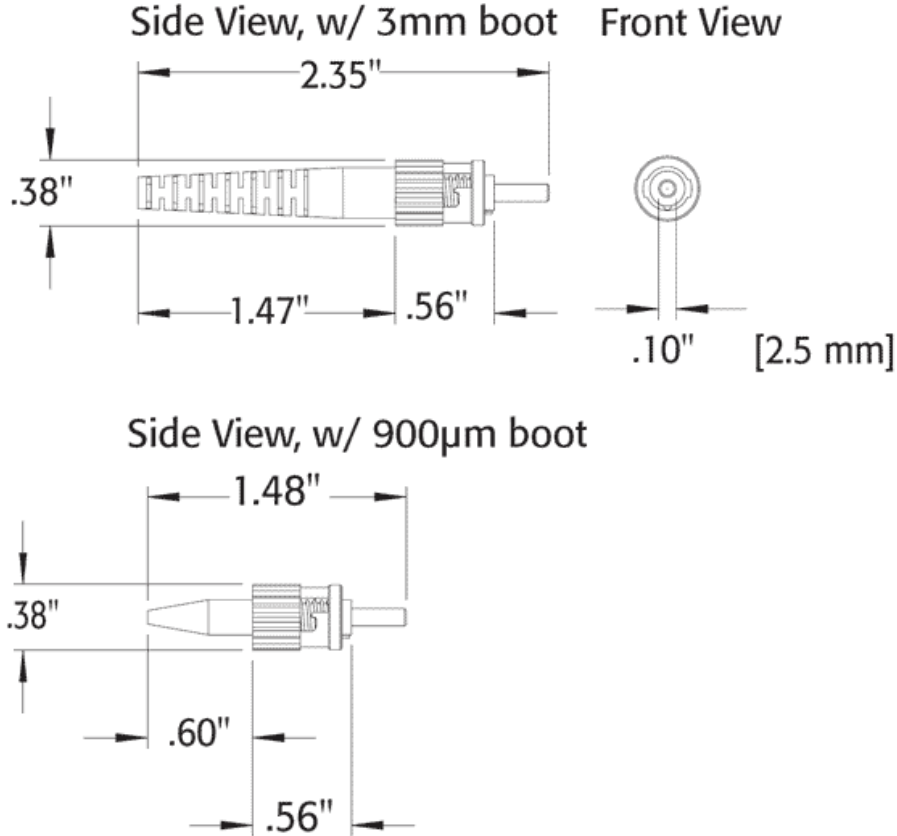

Fast Cure SC Connector

