


# PRODUCT SPECIFICATION SHEET

Product Name: Ideal® Twister® PRO Wire Connectors

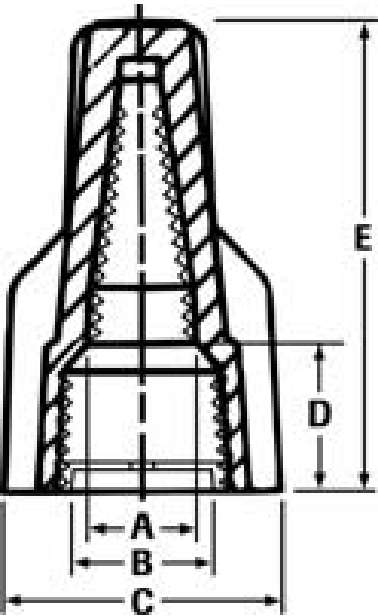

| A                     | B                    | C                      | D                     | E                      |
|-----------------------|----------------------|------------------------|-----------------------|------------------------|
| 11/32 in.<br>(8.8 mm) | 1/2 in.<br>(12.7 mm) | 15/16 in.<br>(23.5 mm) | 7/16 in.<br>(10.7 mm) | 1-1/4 in.<br>(31.8 mm) |

| Property           |                                    | Value                                |
|--------------------|------------------------------------|--------------------------------------|
| Power Range        |                                    | 600V, 1000V for fixtures and signage |
| Gauge Range        | Min (2) #18 (0,75mm <sup>2</sup> ) |                                      |
|                    | Max (4) #10 (6,0mm <sup>2</sup> )  |                                      |
| Wire Type          |                                    | Copper ONLY                          |
| Color              |                                    | Red/Tan                              |
| Material           |                                    | Polypropelene over Zinc Plated Steel |
| Industry Standards |                                    | UL E5238                             |