


PRODUCT SPECIFICATION SHEET

Product Name: Linebacker® Light Weight Cable Protector

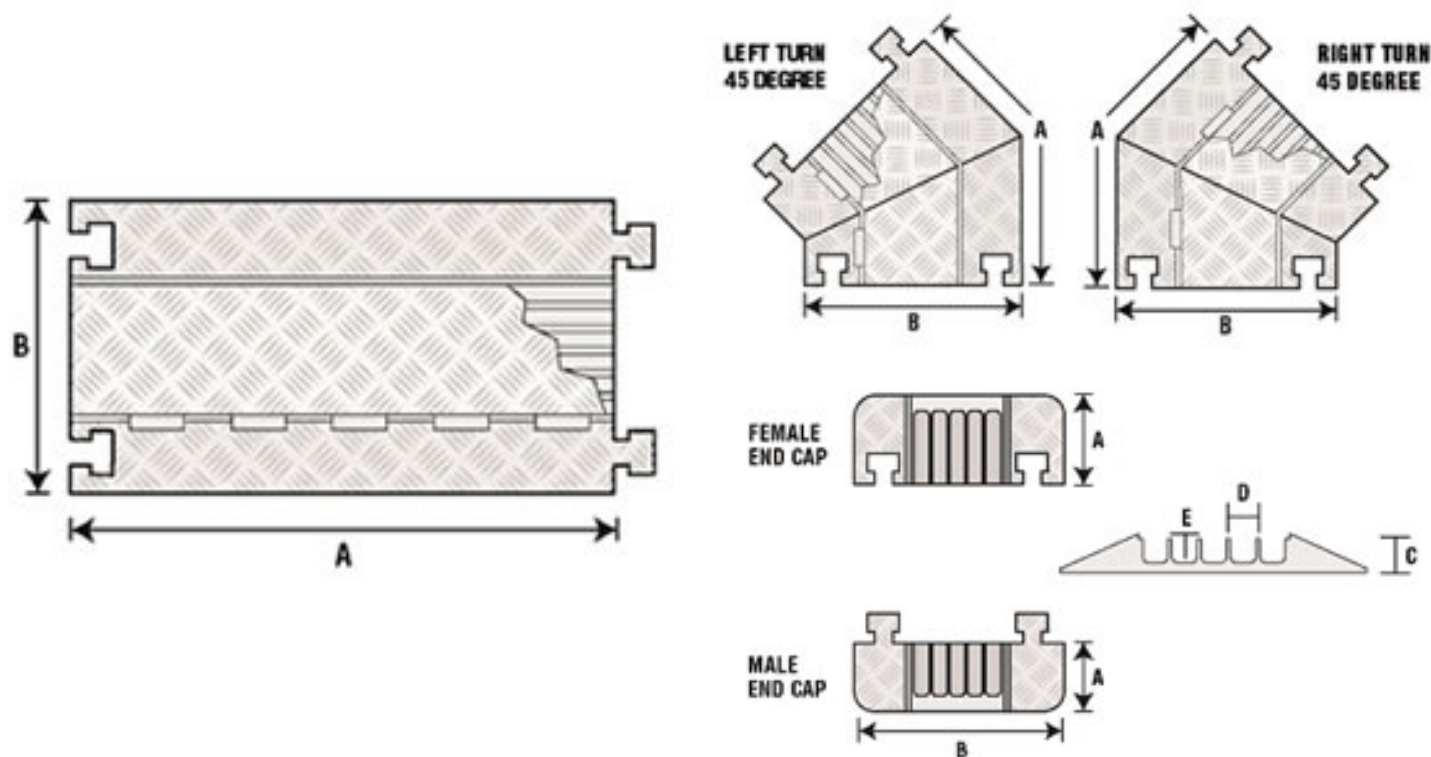

Part #	National Stocking # (NSN)
CP5HD5-YO	5975-01-469-0892
CPEC-HD5	5975-01-469-0529
CPHD5X125R	5975-01-469-2083
CPHD5X125L	5975-01-469-0530
CPHD4X125	5975-01-496-5269
CPHDEC4X125	5975-01-496-5490
CPHD4X125R	5975-01-496-5491
CPHD4X125L	5975-01-496-5492
CPHD3X225	5975-01-496-5495
CPHDEC3X225	5975-01-496-5496
CPHD3X225R	5975-01-496-5500
CPHD3X225L	5975-01-496-5502
CPHD2X325	5975-01-496-5191

Specification Data		Load Capacity Channels Max Load 70°F (21°C)	
Material	Polyurethane (UV stabilized)	5 Channel	20,150 lbs per tire 40,300 lbs per axle
Operating Temp.	-40°F to 120°F (-40°C to 48°C)	4 Channel	20,150 lbs per tire 40,300 lbs per axle
Hinge Pin Material	Reinforced fiberglass	3 Channel	14,210 lbs per tire 28,420 lbs per axle
Safety Symbols	Per ANSI. Z535.3-1991	2 Channel	10,880 lbs per tire 21,760 lbs per axle

Model	Description	A Length	B Width	C Height	D Channel Width	E Channel Height	Weight
5 Channel Specs							
CP5XHD5-YO	5-Channel Cord Protector	36" (914.4mm)	20" (508mm)	2.31" (57.2mm)	1.25" (31.8mm)	1.25" (31.8mm)	25 lbs (11.3 kg)
CPEC-HD5	End Caps (female)	7.5" (190.5mm)	20" (508mm)	2.31" (57.2mm)	1.25" (31.8mm)	1.25" (31.8mm)	3.5 lbs (1.6 kg)
	End Caps (male)	5.25" (133.4mm)	20" (508mm)	2.31" (57.2mm)	1.25" (31.8mm)	1.25" (31.8mm)	3.5 lbs (1.6 kg)
CPHD5X125R	45° Right Turn	25" (635mm)	20" (508mm)	2.31" (57.2mm)	1.25" (31.8mm)	1.25" (31.8mm)	13 lbs. (5.9kg)
CPHD5X125L	45° Left Turn	25" (635mm)	20" (508mm)	2.31" (57.2mm)	1.25" (31.8mm)	1.25" (31.8mm)	13 lbs. (5.9kg)
4 Channel Specs							
CPHD4X125	4-Channel Cord Protector	36" (914.4mm)	20" (508mm)	2.31" (57.2mm)	2" (50.8mm)	1.25" (31.8mm)	26 lbs (11.8kg)
CPHDEC4X125	End Caps (female)	7.5" (190.5mm)	20" (508mm)	2.31" (57.2mm)	2" (50.8mm)	1.25" (31.8mm)	3.5 lbs (1.6 kg)
	End Caps (male)	5.25" (133.4mm)	20" (508mm)	2.31" (57.2mm)	2" (50.8mm)	1.25" (31.8mm)	3.5 lbs (1.6 kg)
CPHD4X125R	45° Right Turn	25" (635mm)	20" (508mm)	2.31" (57.2mm)	2" (50.8mm)	1.25" (31.8mm)	13 lbs. (5.9kg)
CPHD4X125L	45° Left Turn	25" (635mm)	20" (508mm)	2.31" (57.2mm)	2" (50.8mm)	1.25" (31.8mm)	13 lbs. (5.9kg)
3 Channel Specs							
CPHD3X225	3-Channel Cord Protector	36" (914.4mm)	20" (508mm)	3.05" (77.5mm)	2.25" (57.2mm)	2.25" (57.2mm)	28 lbs (12.7 kg)
CPHDEC3X225	End Caps (female)	8.25" (209.6mm)	20" (508mm)	3.05" (77.5mm)	2.25" (57.2mm)	2.25" (57.2mm)	4 lbs. (1.8 kg)
	End Caps (male)	6" (152.4mm)	20" (508mm)	3.05" (77.5mm)	2.25" (57.2mm)	2.25" (57.2mm)	4 lbs. (1.8 kg)
CPHD3X225R	45° Right Turn	25" (635mm)	20" (508mm)	3.05" (77.5mm)	2.25" (57.2mm)	2.25" (57.2mm)	15 lbs. (6.8 kg)
CPHD3X225L	45° Left Turn	25" (635mm)	20" (508mm)	3.05" (77.5mm)	2.25" (57.2mm)	2.25" (57.2mm)	15 lbs. (6.8 kg)
2 Channel Specs							
CPHD2X325	2-Channel Cord Protector	36" (914.4mm)	22" (558.8 mm)	4.13" (101.6 mm)	3.25" (82.6 mm)	3.25" (82.6 mm)	33 lbs (15 kg)