


PRODUCT SPECIFICATION SHEET

Product Name: Panduit® Polyester & Polyimide Component Labels

Polyester		Polyamid
Material	White polyester label with pressure sensitive acrylic adhesive	White polyimide label with pressure sensitive acrylic adhesive
Print Method	Thermal transfer	Thermal transfer
Temperature Range	-40° to 320° F (-40° to 150° C)	-40° to 350° F (-40° to 177° C)
Maximum Intermittent Temp.	n/a	482° F (250° C) > 30 minutes 527° F (275° C) > 20 minutes 572° F (300° C) > 10 minutes 617° F (325° C) > 5 minutes
Recommended Ribbon	Resin ribbon for desktop printer (TDP42H series - RHR4BL-S)	Resin ribbon for desktop printer (TDP42H series - RHR4BL-S)
UL Recognized	File # MH14979	File # MH14979
RoHS Compliance	Material is RoHS compliant per European Directive 2002/95/EC on the Restriction of Hazardous Substances	Material is RoHS compliant per European Directive 2002/95/EC on the Restriction of Hazardous Substances

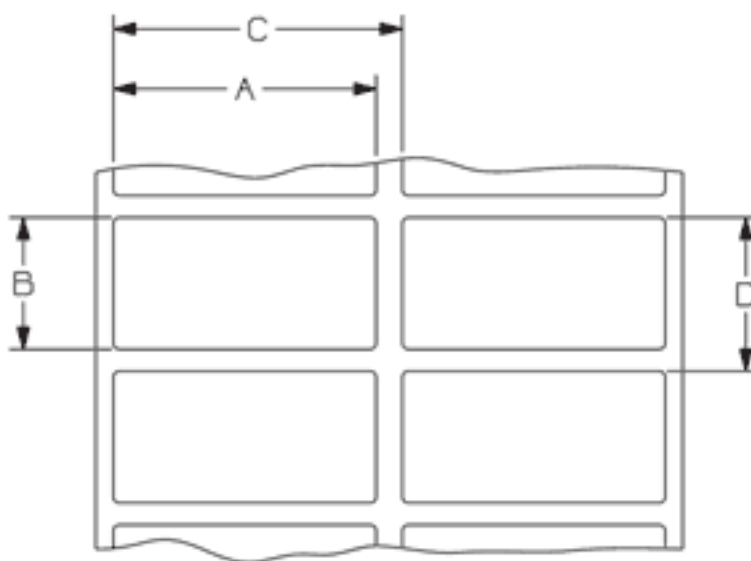

Part #	W x H (A x B)	Horizontal Repeat C	Vertical Repeat D	Labels/Row	Labels/Package
PAN-C080X020-YJT	0.80" W x 0.20" H (20.3mm x 5.1mm)	0.80" (20.3mm)	0.33" (8.4mm)	3	10,000