


PRODUCT SPECIFICATION SHEET

Product Name: Richco Standard & Flame Retardant Slit Harness Wrap

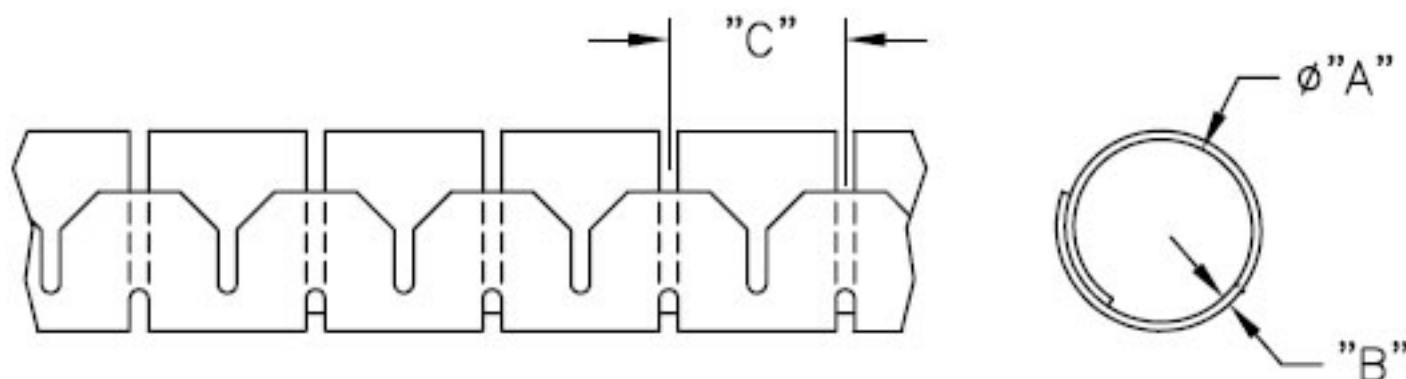

Part #	Dia. "A"	Max Bundle Diameter	Wall "B"	Spiral Spacing "C"
SHR08V0	0.31" (8mm)	0.39" (10mm)	0.032" (0.8mm)	0.39" (10mm)
SHR15V0	0.59" (15mm)	0.63" (16mm)	0.032" (0.8mm)	0.55" (14mm)
SHR20V0	0.79" (20mm)	0.90" (23mm)	0.035" (0.9mm)	0.67" (17mm)
SHR25V0	0.98" (25mm)	0.98" (25mm)	0.039" (1.0mm)	0.79" (20mm)
SHR32V0	1.25" (32mm)	1.25" (32mm)	0.050" (1.3mm)	0.980" (24.9mm)
SHR08PPB	0.31" (8mm)	0.39" (10mm)	0.032 (0.8mm)	0.39" (10mm)
SHR15PPB	0.59" (15mm)	0.63" (16mm)	0.032 (0.8mm)	0.55" (14mm)
SHR20PPB	0.79" (20mm)	0.90" (23mm)	0.035 (0.9mm)	0.67" (17mm)
SHR25PPB	0.98" (25mm)	0.98" (25mm)	0.039 (1.0mm)	0.79" (20mm)

Specifications			
Mechanical Properties	Dimension	DIN-ISOR R	Values
Tensile Strength	N/mm ²	53455-527	80 ± 5
Elongation of breaking point	%	53455-527	10 ± 2
Flexural strength	N/mm ²	53452-178	105 ± 10
Impact strength	Kj/m ²	ASTM-D 256	5 ± 2
Physical Properties	Dimension	ASTM-ISOR R	Values
Shore hardness	Points	D 2240-Type D	79 ± 2
Density	KG/dm ³	D 792-1183	1,16 ± 0,02
Melt flow index	GRM/10min	D 1238-1133	6 ± 2

Specifications			
Thermal Properties	Dimension	ASTM-ISOR R	Values
Fusion temperature	°C	D 2117-1218	225
Plast temperature	°C	D 2990-899	> 212
Inflammability UL-94	-	D 635	V-0
Thread 960 °C	-	-	OK
Application temperature	-	-	-
Instantaneous	°C		-60 to +80
Continue	°C		-60 to +150
General Properties	Dimension	ASTM-ISOR R	Values
Grane humidity	%	D 570-1110	0,2 max
Heat treatment	-	-	Yes
Color	-	-	Black