110-Style Crossconnect Products
110 Connector Blocks

APPLICATION

Use with 110 wiring bases to provide a gas-tight IDC connection.

STANDARDS COMPLIANCE

Meets or exceeds all applicable standards: UL listed; complies with TIA/EIA-568-B requirements for Category 5e performance; and meets FCC Part 68.

PHYSICAL SPECIFICATIONS

Dimensions:
C-3: .926"H x .090"W x .3"D
C-4: .926"H x 1.20"W x .3"D
C-5: .926"H x 1.50"W x .3"D

Material: Made of fire-retardant plastic rated UL 94V-0 with solder plated IDC's

DESIGN CONSIDERATIONS

- Available in three pair-count sizes: C-3, C-4 and C-5
- These 110 IDC connector blocks can withstand 200 reterminations
- Seat the connector blocks on the 110 wiring base index strip with a 5-pair spring-loaded termination tool

WARRANTY INFORMATION

For a copy of Leviton product warranties, visit www.levitonvoicedata.com/ccs/warranty.aspx
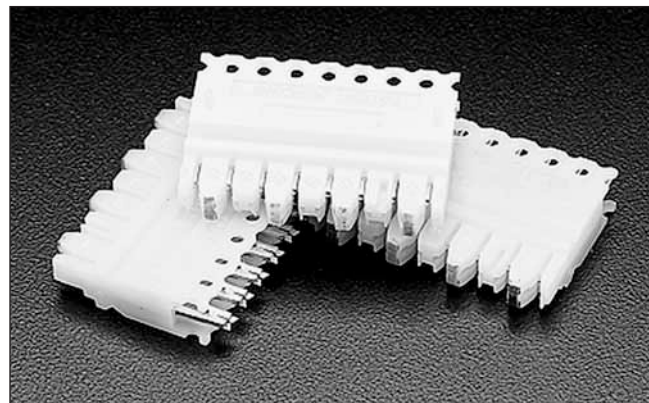
TYPICAL SPECIFICATION

The 110 connector blocks shall support termination for voice, security, and Category 5e data applications, including high megabit and shared-sheath applications when used with Power Sum rated cabling. The blocks shall be Category 5e compliant, UL listed and TIA/EIA-568-B compliant. They shall be made of fire-retardant UL 94V-0 plastic with solder-plated insulation displacement connectors, and must securely seat wires on 110 wiring bases, providing a gas-tight IDC connection that can withstand 200 reterminations.
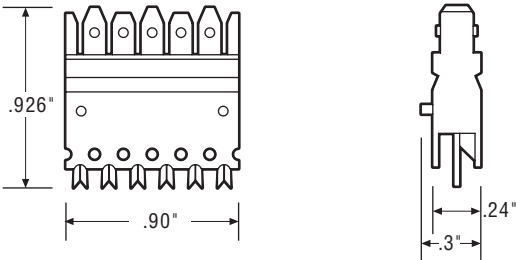
ELECTRONIC FILES

For CAD files, Typical Specs, or Dimensional Line Art (.DXF, .DWG, MS-DOS.eps or .TXT), visit www.levitonvoicedata.com.
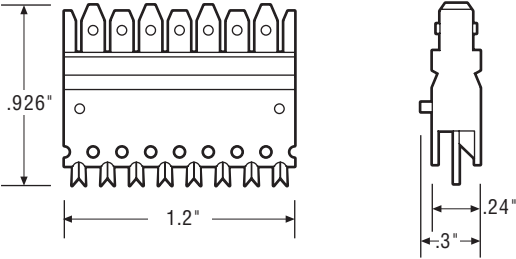
110-Style
Crossconnect Products

C-3 Connector Block

.926" .90" .24" .3"

C-4 Connector Block

.926" 1.2" .24" .3"

C-5 Connector Block

.926" 1.5" .24" .3"
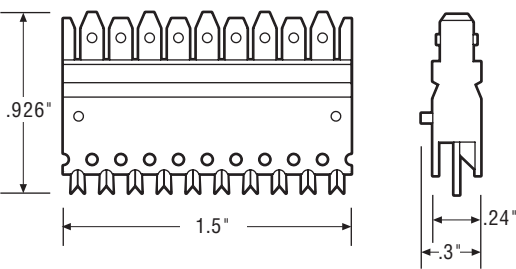
PART NUMBERS

Description	Part No.
C-3 Connector Blocks (bag of 10)	49103-IDC
C-4 Connector Blocks (bag of 10)	49104-IDC
C-4 Connector Blocks (bag of 50)	49104-I50
C-5 Connector Blocks (bag of 10)	49105-IDC