



The NeatHub Series is a flexible desktop power solution designed to meet a range of workspace requirements. Available in three configurations, NeatHub centralizes power access with a clean, compact design that mounts easily above or below the worksurface. Options include a USB-C model for modern charging needs, a version that delivers power above and below the desk, and a standard configuration for everyday connectivity. With discreet installation and multiple mounting styles, NeatHub helps keep workspaces organized, accessible, and free of cable clutter.

Warranty

3 Years, 24/7

Features

- NeatHub offers a two-piece clamp or direct mount, allowing installation above or below the worksurface to fit any setup.
- Delivers power for mobile phones, tablets, laptops, and any device with an AC plug.
- Smart power distribution automatically balances delivery to connected devices, preventing overcharging and short circuits.
- Attaches securely with minimal effort for a fast, hassle-free setup.
- Combines with NeatTech and other Humanscale cable management to support a cleaner, more organized workstation.

NeatHub Charging Station:

- 1 USB-C port supporting up to 65W fast charging.
- 1 USB-A port supporting 18W charging.
- Dual AC outlets.

NeatHub USB Charging Station:

- Dual USB-C ports supporting up to 100W fast charging.
- Dual USB-A ports supporting up to 22.5W charging.

NeatHub Charging Station Duo:

- Offers integrated power above and below the worksurface in a single solutions.
- Supports environments with strict electrical code requirements.
- 1 USB-C port supporting 65W fast charging (45W when both ports are used).
- 1 USB-A port supporting 18W charging.
- 11 A/C outlets (NEMA 5-15): 2 above desk, 9 below desk.

Model Options

Charging Station



Inputs

2 – AC Outlets
(max. 1,875W)
1 – USB-A (max. 18W)
1 – USB-C (max. 65W)

USB Charging Station



Inputs

2 – USB-A (max. 22.5W)
2 – USB-C (max. 100W)

Charging Station Duo



Inputs

2 – AC Outlets
(above the surface)
9 – AC Outlets
(below the surface)
1 – USB-A (max. 18W)
1 – USB-C (max. 65W /
max. 45W (both ports))

Mount Options

Above desk, Clamp Mount




90°/Flat Mount, Bracket Mount



Color Options



Black



White

Product Specifications


		Imperial	Metric
Product Dimensions	Charging Station	2.17 in H x 6.3 in W x 1.5 in D	55 mm H x 160 mm W x 40 mm D
	USB Charging Station	3.35 in H x 3.35 in W x 1.04 in D	85 mm H x 85 mm W x 26 mm D
	USB Charging Station Duo	3.2 in H x 6.3 in W x 3.0 in D	79 mm H x 160 mm W x 77 mm D
Product Weight	Charging Station	2.34 lbs Clamp Mount; 1.60 lbs 90° Mount	1.06 kg Clamp Mount; .73 kg 90° Mount
	USB Charging Station	2 lbs Clamp Mount; 1.28 lbs 90° Mount	.91 kg Clamp Mount; .58 kg 90° Mount
	USB Charging Station Duo	3.6 lbs	1.62 kg
Cord Length	Charging Station	6 ft 5 in	1,956 mm
	USB Charging Station	6 ft 5 in	1,956 mm
	USB Charging Station Duo	9 ft Wall Plug to Power Strip; 3 ft Power Strip to NeatHub	2,743 mm Wall Plug to Power Strip; 914 mm Power Strip to NeatHub
Worksurface Mount Requirements	Clamp Mount	0.5 in min. - 2.75 in max.	13 mm min. - 70 mm max.
	90°/Flat Mount	0.75 in min.	19 mm min.

Product Specifications (cont'd)

NeatHub™ Charging Station




Above Desk Mount

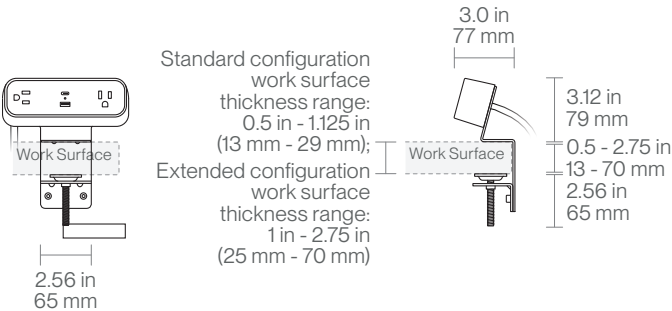


90°/Flat Mount




NeatHub™ USB Charging Station

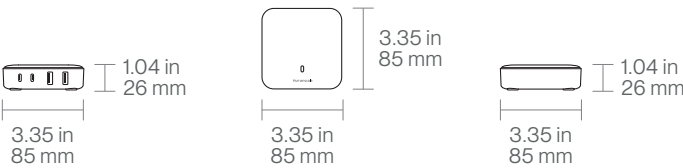

Above Desk Mount

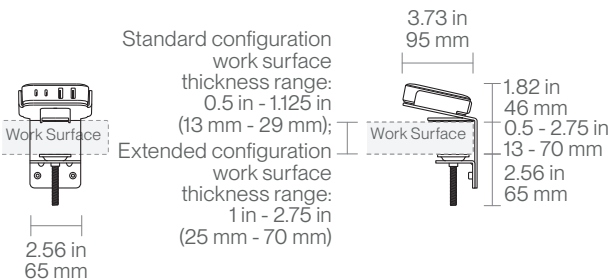


90°/Flat Mount

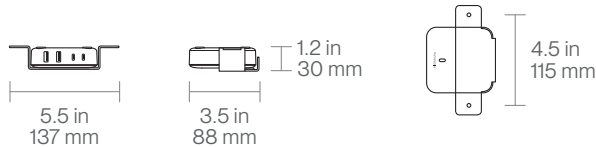


Product Specifications (cont'd)

NeatHub™ Charging Station Duo


Charging Station Clamp Mount - Front

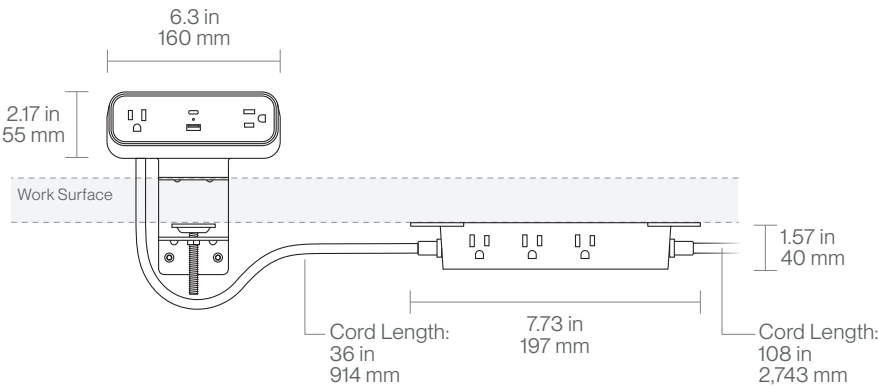


Charging Station Clamp Mount - Side

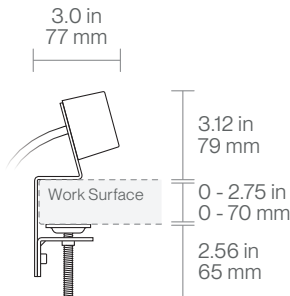


Charging Station Flat Mount - Front

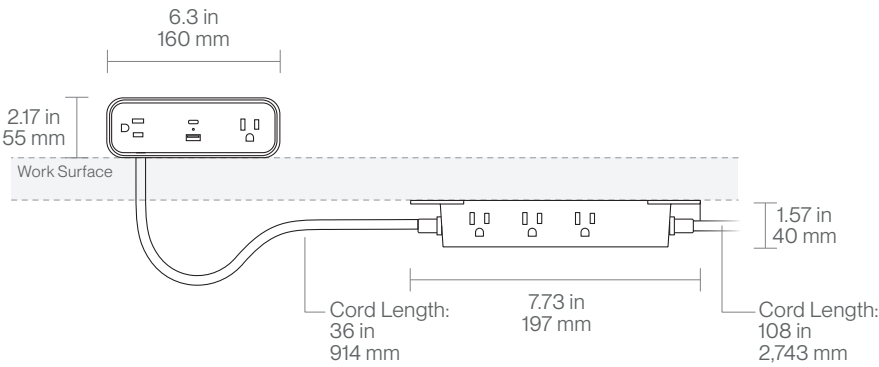


Charging Station Flat Mount - Side

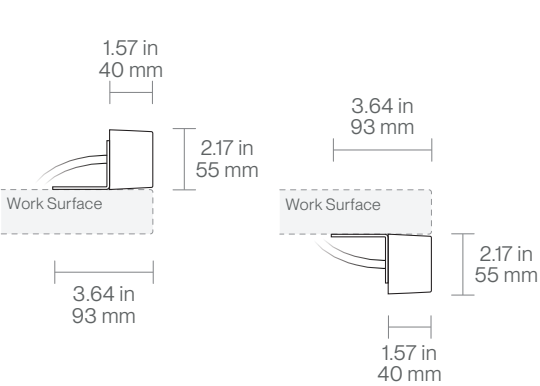


Main Power Brick - Bottom

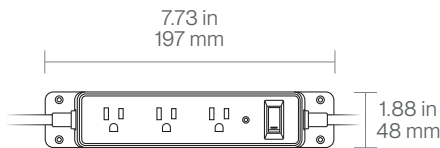

Main Power Brick - Side

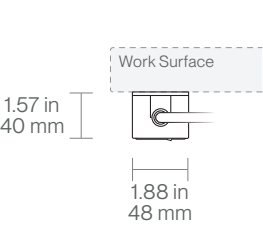

Main Power Brick - Back

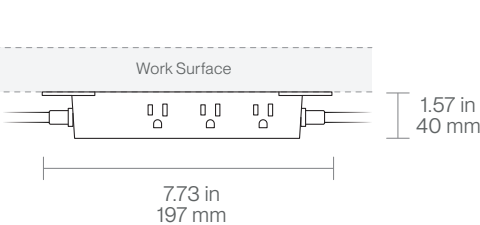

Electrical Specifications

	Charging Station	USB Charging Station	USB Charging Station Duo
Input	15A, 125V, AC 60Hz max., 1,875W	100-240V, 50/60Hz, 2.5A max.	15A, 125V, AC 60Hz max., 1,875W
Output	USB-C: 5V/3A; 9V/3A;12V3A; 15V/3A; 20V/3,25A Power Delivery 65W max.	USB-C1: 5V-3A,15W; 9V-3A,27W;12V-3A,36W; 15V-3A,45W; 20V-5A,100W	2x NEMA 5-15R (NeatHub) 9x NEMA 5-15R (power strip) 1x USB-A, 1x USB-C
	USB-A: 5V/3A; 9V/2A; 12V/1.5A; QC 18W max.	USB-C2: 5V-3A,15W; 9V-3A,27W;12V-3A,36W; 15V-3A,45W; 20V-5A,100W PPS: 3.3-11V-4A	Connected to one of the two ports: USB-A 5VDC, 3A; 9VDC, 2A; 12VDC, 1.5A QC18W Max USB-C (5V, 9V, 12V, 15V)DC, 3A, 20VDC, 3.25A PD65W Max.
		USB-A1: 4.5V-5A,22.5W; 5V-4.5A,22.5W;9V-2A,1BW; 12V/-1.5A,1BW USB-A2: 4.5V- 5A,22.5W; 5V-4.5A,22.5W;9V- 2A,1BW; 12V-1.5A,1BW USB- C1+USB-C2: 65W+30W(95W Max)	Both ports connected: USB-C (5V, 9V, 12V, 15V)DC, 3A 20VDC, 2.25A PD45W Max USB-A 5VDC, 3A; 9VDC, 2A; 12VDC, 1.5A QC18W Max
		USB-C1+USB-A1: 65W + 18W(83W Max)	
		USB-C1+USB A2:65W+18W (83W Max)	
		USB-C2+USB-A1: 65W+18W (83W Max)	
		USB-C2+USB-A2: 65W+18W(83W Max)	
		USB-A1+USB-A2: 5V-4.5A(22.5W Max)	
		USB-C1+USB-C2+USB-A1: 45W+30W+18W(93W Max)	
		USB-C1+USB-C2+USB-A2: 45W+30W+18W(93W Max)	
		USB-C1+(USB-A1+USB-A2): 65W+22.5W (87.5W Max)	
		USB-C2+(USB-A1+USB-A2): 65W+22.5W(87.5W Max)	
		USB-C1+USB- C2+(USB-A1+USB-A2) 45W+30W+22.5W(97.5W Max)	
Power Strip:			
Circuit Breaker Rating	N/A	N/A	15A
Surge Protection Rating	N/A	N/A	900 Joules
Total		100 W max.	
Temperature Operating	32° to 86°F / 0°C to 30°C	32° to 86°F / 0°C to 30°C	32° to 86°F / 0°C to 30°C
Temperature Storage	14° to 122°F / -10°C to 50°C	14° to 122°F / -10°C to 50°C	14° to 122°F / -10°C to 50°C