
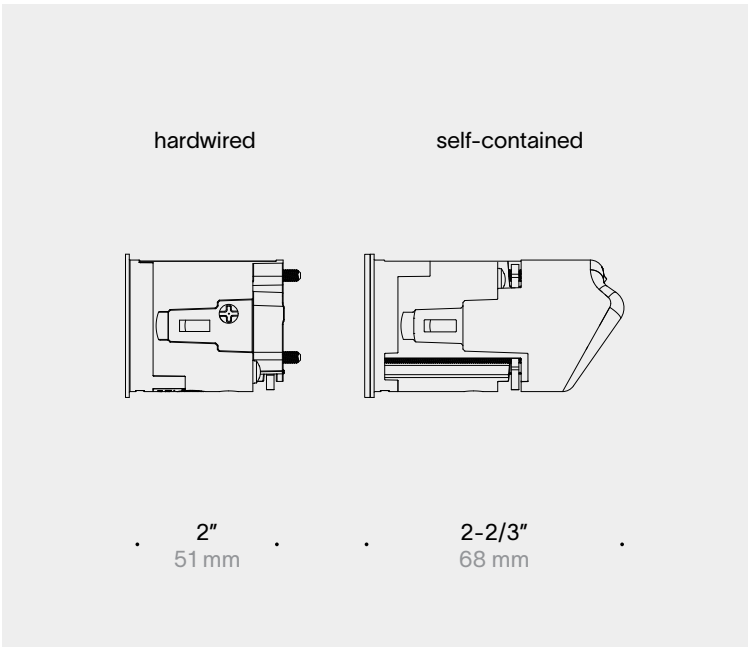


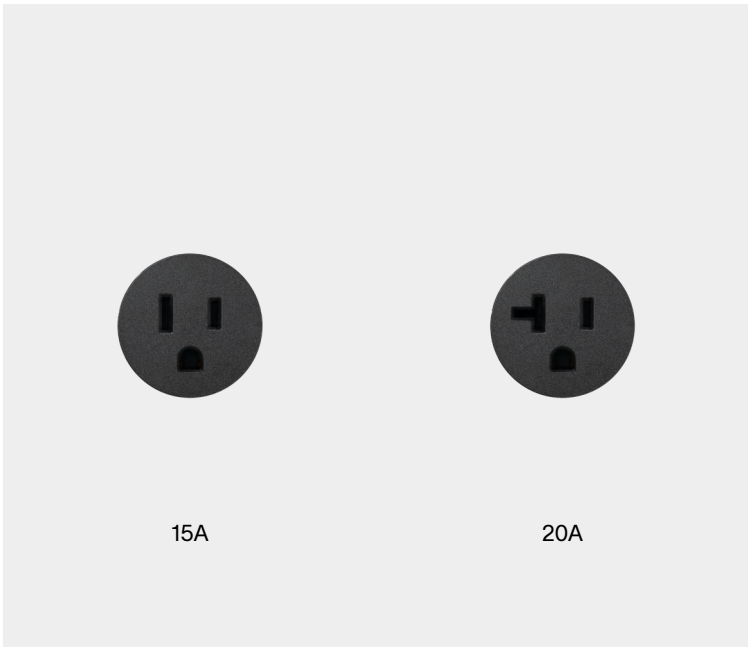

unifit outlet | single hardwired - self-contained



installation

outlet specs

application	drywall, wood and stone	
electrical details	15/20A - 125V	NEMA 5-15/20
wire thickness	15A - 14AWG	20A - 12AWG
outlet diameter	Ø1-1/2"	
wire stripping lenght	3/8"	
cut-out	Ø1-3/8" hole	
panel thickness	1/4 to 1-3/8" (adjustable lugs)	
wire fixation	screw terminals	
	back box required for hardwired	
other	patent pending	
	tamper resistant	

order number

	product code
unifit outlet single - hardwired	9100-0005
unifit outlet single - self-contained	9100-0003

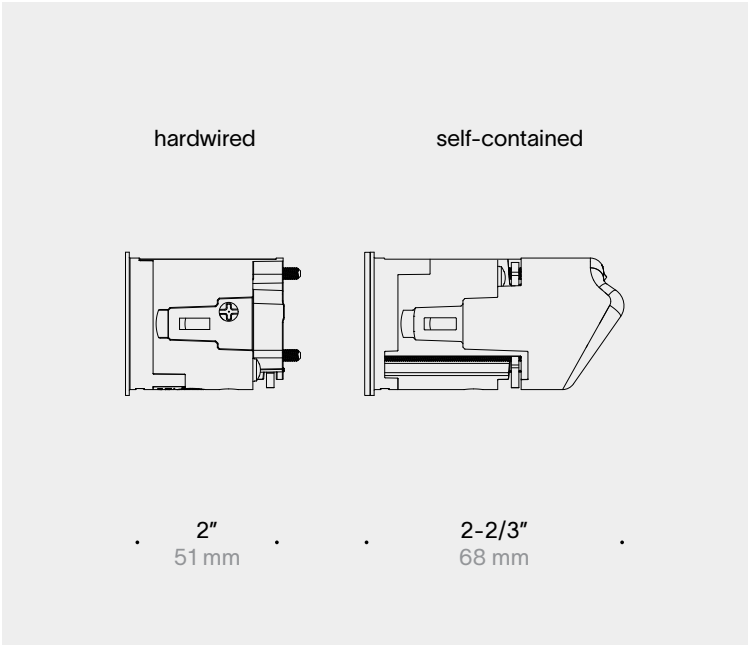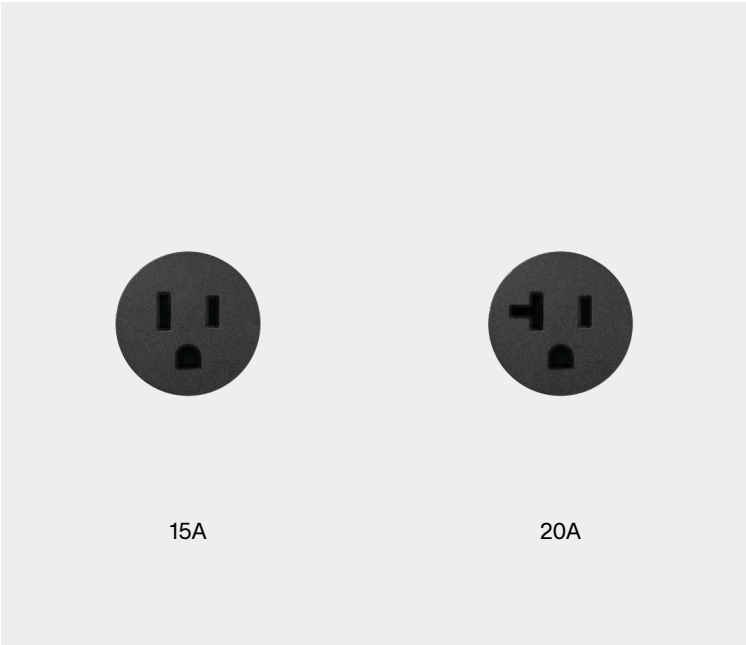

unifit outlet | single hardwired - self-contained

unifit cover plate (not incl.)

	product code	
	15A	20A
white	9000-0022	9000-0023
sand	9000-0024	9000-0025
clay	9000-0026	9000-0027
stone	9000-0126	9000-0127
espresso	9000-1022	9000-1023
graphite	9000-1024	9000-1025
black	9000-0020	9000-0021

accessories (not incl.)

	product code
drywall mud plate single - fix *	9000-0090
drywall mud plate double - fix *	9000-0090
drywall mud plate single - adjustable *	9000-0092
drywall mud plate double - adjustable *	9000-0093
back box cover plate single - one gang	9000-0010
back box cover plate double - two gang	9000-0011

* drywall mud plates exclusively for self-contained installations