

## Type UA - Liquid-Tight Flexible Metal Conduit (LFMC)

### Construction


- Constructed of continuously interlocked hot dipped zinc galvanized steel core for exceptional crush and corrosion resistance.
- Approved for direct burial and in concrete trade sizes 3/8" through 4".
- Durable, sunlight resistant and flame retardant thermoplastic PVC jacket that resists heat, oil and chemical breakdown.

### Certifications

U.L. LISTED

CSA CERTIFIED

RoHS WEEE COMPLIANT

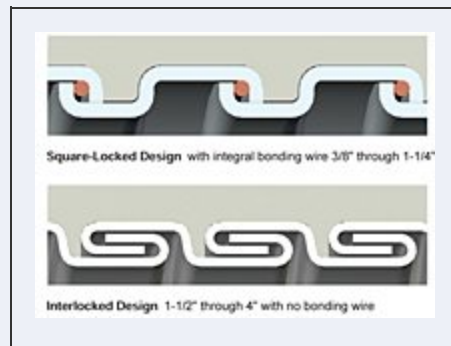

1 2

<u>Item #</u>	<u>Electrical Trade Size</u>	<u>Length</u>	<u>Packaging</u>	<u>Inside Diameter</u>	<u>Outside Diameter</u>
<u>34202</u>	3/8 in 12 mm	100 ft 30.48 m	Small Cartons	0.484 to 0.504 in 12.294 to 12.802 mm	0.690 to 0.710 in 17.526 to 18.034 mm
<u>34201</u>	3/8 in 12 mm	200 ft 60.96 m	Standard Carton	0.484 to 0.504 in 12.294 to 12.802 mm	0.690 to 0.710 in 17.526 to 18.034 mm
<u>34204</u>	3/8 in 12 mm	800 ft 243.84 m	Small Reels	0.484 to 0.504 in 12.294 to 12.802 mm	0.690 to 0.710 in 17.526 to 18.034 mm

<u>Item #</u>	<u>Electrical Trade Size</u>	<u>Length</u>	<u>Packaging</u>	<u>Inside Diameter</u>	<u>Outside Diameter</u>
<u>34203</u>	3/8 in 12 mm	1500 ft 457.2 m	Standard Reels	0.484 to 0.504 in 12.294 to 12.802 mm	0.690 to 0.710 in 17.526 to 18.034 mm
<u>34212</u>	1/2 in 16 mm	100 ft 30.48 m	Small Cartons	0.622 to 0.642 in 15.799 to 16.307 mm	0.822 to 0.840 in 20.879 to 21.336 mm
<u>34211</u>	1/2 in 16 mm	200 ft 60.96 m	Standard Carton	0.622 to 0.642 in 15.799 to 16.307 mm	0.822 to 0.840 in 20.879 to 21.336 mm
<u>34214</u>	1/2 in 16 mm	500 ft 152.4 m	Small Reels	0.622 to 0.642 in 15.799 to 16.307 mm	0.822 to 0.840 in 20.879 to 21.336 mm
<u>34213</u>	1/2 in 16 mm	1000 ft 304.8 m	Standard Reels	0.622 to 0.642 in 15.799 to 16.307 mm	0.822 to 0.840 in 20.879 to 21.336 mm
<u>34215-3000</u>	1/2 in 16 mm	25 ft 7.62 m	Small Cartons	0.622 to 0.642 in 15.799 to 16.307 mm	0.822 to 0.840 in 20.879 to 21.336 mm
<u>34215-6000</u>	1/2 in 16 mm	50 ft 15.24 m	Small Cartons	0.622 to 0.642 in 15.799 to 16.307 mm	0.822 to 0.840 in 20.879 to 21.336 mm
<u>34222</u>	3/4 in 21 mm	100 ft 30.48 m	Small Cartons	0.820 to 0.840 in 20.828 to 21.336 mm	1.030 to 1.050 in 26.162 to 26.670 mm
<u>34221</u>	3/4 in 21 mm	150 ft 45.72 m	Standard Carton	0.820 to 0.840 in 20.828 to 21.336 mm	1.030 to 1.050 in 26.162 to 26.670 mm
<u>34228</u>	3/4 in 21 mm	500 ft 152.4 m	Small Reels	0.820 to 0.840 in 20.828 to 21.336 mm	1.030 to 1.050 in 26.162 to 26.670 mm
<u>34229</u>	3/4 in 21 mm	1000 ft 304.8 m	Standard Reels	0.820 to 0.840 in 20.828 to 21.336 mm	1.030 to 1.050 in 26.162 to 26.670 mm
<u>34225-3000</u>	3/4 in 21 mm	25 ft 7.62 m	Small Cartons	0.820 to 0.840 in 20.828 to 21.336 mm	1.030 to 1.050 in 26.162 to 26.670 mm
<u>34225-6000</u>	3/4 in 21 mm	50 ft 15.62 m	Small Cartons	0.820 to 0.840 in 20.828 to 21.336 mm	1.030 to 1.050 in 26.162 to 26.670 mm
<u>34231</u>	1 in 27 mm	100 ft 30.48 m	Standard Carton	1.041 to 1.066 in 26.441 to 27.076 mm	1.290 to 1.315 in 32.766 to 33.401 mm
<u>34238</u>	1 in 27 mm	400 ft 121.92 m	Small Reels	1.041 to 1.066 in 26.441 to 27.076 mm	1.290 to 1.315 in 32.766 to 33.401 mm
<u>34237</u>	1 in 27 mm	1000 ft	Small Reels	1.041 to 1.066 in 26.441 to 27.076 mm	1.290 to 1.315 in 32.766 to 33.401 mm
<u>34241</u>	1-1/4 in 35 mm	50 ft 15.24 m	Standard Carton	1.380 to 1.410 in 35.052 to 35.814 mm	1.630 to 1.660 in 41.402 to 42.164 mm

<u>Item #</u>	<u>Electrical Trade Size</u>	<u>Length</u>	<u>Packaging</u>	<u>Inside Diameter</u>	<u>Outside Diameter</u>
<u>34248</u>	1-1/4 in 35 mm	250 ft 76.2 m	Small Reels	1.380 to 1.410 in 35.052 to 35.814 mm	1.630 to 1.660 in 41.402 to 42.164 mm
<u>34251</u>	1-1/2 in 41 mm	50 ft 15.24 m	Standard Carton	1.575 to 1.600 in 40.005 to 40.640 mm	1.865 to 1.900 in 47.371 to 48.260 mm
<u>34254</u>	1-1/2 in 41 mm	150 ft 45.72 m	Small Reels	1.575 to 1.600 in 40.005 to 40.640 mm	1.865 to 1.900 in 47.371 to 48.260 mm
<u>34261</u>	2 in 53 mm	50 ft 15.24 m	Standard Carton	2.020 to 2.045 in 51.308 to 51.943 mm	2.340 to 2.375 in 59.436 to 60.325 mm
<u>34268</u>	2 in 53 mm	100 ft 30.48 m	Small Reels	2.020 to 2.045 in 51.308 to 51.943 mm	2.340 to 2.375 in 59.436 to 60.325 mm