



REVISIONS		
Rev	DESCRIPTION	DATE
A	INITIAL RELEASE	

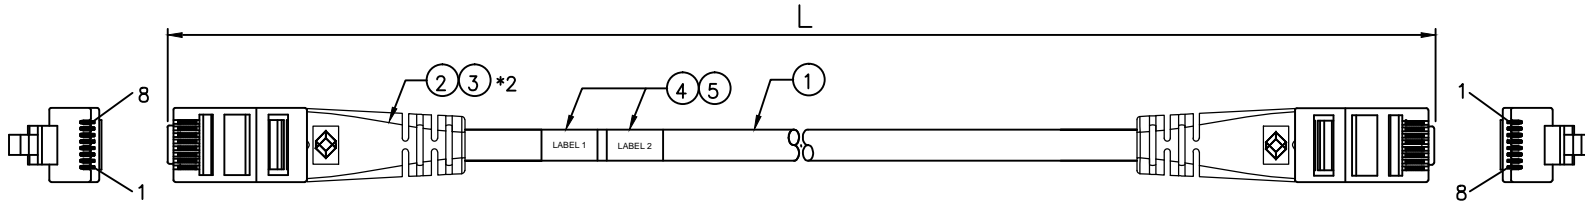


" BLACK BOX CORPORATION GUARANTEED FOR LIFE (724) 746-5500 --- GIGATRUE CATEGORY 6A --- TESTED to 650 MHz --- UL E196163-G F/UTP TYPE CMR C(UL)US CMG 4 PR 26 AWG SHIELDED 75C --- TIA-568-C.2 --- RoHS --- (LOT DESIGNATOR) (SEQUENTIAL FOOTAGE) "

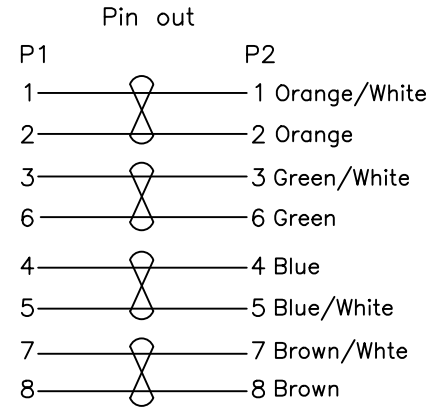

Physical Construction

Conductor: 26 AWG 7/34 Standard Tinned Copper
 Insulation Material: Polyolefin
 Insulation Diameter: 0.036_s
 Internal Filler: Center Spline separator
 Shielding: An aluminized polyester foil shield (100% COVERAGE)
 Drain Wire: 26 AWG 7/34 Stranded Tinned Copper Wire
 Cable Jacket: POLYVINYLCHLORIDE (PVC) , thickness 0.24_s
 Cable O.D.: 0.235 NOM, (0.242 Max)

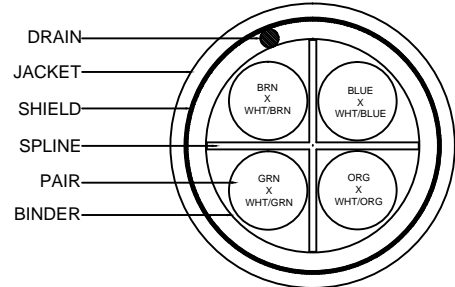

Cable Properties

Temp Rating (Min/Max) : -20 C to 75 C
 Flame Rating: NEC (UL) Type CMR / CMG
 CEC C (UL) Type CMR CMG
 Frequency: Tested to 650 Mhz

Electrical Properties

Voltage Rating, MAX: 300V
 D.C. Resistance, MAX.: 14.0 Ω
 Impedance, NOM. 100 ± 15 Ω 1 - 100 MHz
 100 ± 20 Ω 100 - 500 MHz
 Mutual Capacitance: 13.5 pF / Ft at 1.0 Mhz
 Velocity Of Propagation: 68%

NO.	TITLE	DESCRIPTION	Q'TY	UNIT
5	LABEL	ID CABLE (MM/YY)	1	PCS
4	LABEL	CABLE LABEL	1	PCS
3	BOOT	SNAGLESS BOOT CLEAR	2	PCS
2	CONN.	RJ45 SHIELD PLUG	2	PCS
1	WIRE	SHIELDED TWISTED PAIRS 26 AWG	L	FT

The Information contained in this document is the sole property of Black Box Corporation of Pennsylvania. Any reproduction in part or whole without the written permission of Black Box Corp. is prohibited.

UNLESS OTHERWISE SPECIFIED:
 DIMENSIONS ARE IN INCHES
 TOLERANCES:
 ANGULAR: MACH
 INTERPRET GEOMETRIC TOLERANCING PER:
 MATERIAL CRS
 FINISH POWDER COAT
 DO NOT SCALE DRAWING



NAME	DATE	TITLE:
Drawn By	3/11/2013	Gigatrue 3 Category 6A Patch Cable - Blue
ENG APPR. Approved By	3/11/2013	
CHECKED Checked By	3/11/2013	SIZE DWG. NO.
COMMENTS:		B C6APC80S-BL-XX
		SCALE: 1:1
		SHEET 1 OF 1

REV
A