


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

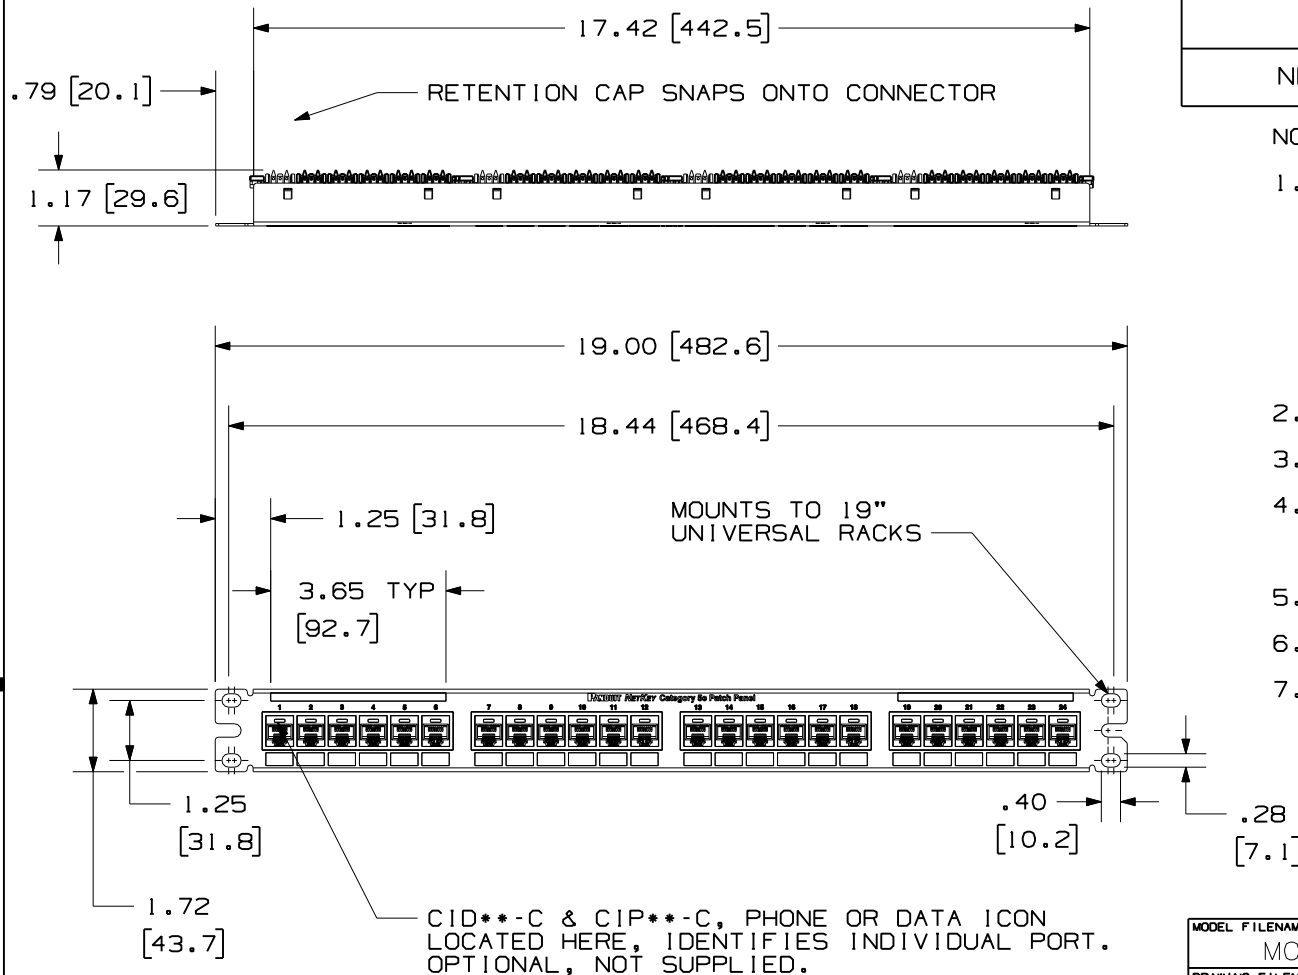

PANDUIT PART NO.	WEIGHT (APPROX.)
NK5EPPG24Y	1.25 lb (567 g)

NOTES:

- MATERIAL:  
 PANEL HOUSING: STEEL  
 RJ45 MODULE: THERMOPLASTIC RESIN UL94V-0  
 PUNCHDOWN BLOCKS: THERMOPLASTIC RESIN UL94V-0  
 BEZEL ASSEMBLY: THERMOPLASTIC RESIN UL94H-B  
 RETENTION CAP:  
 THERMOPLASTIC RESIN UL94V-0
- 24 PORT PATCH PANEL 8 POSITION 8 WIRE.
- THE PATCH PANEL IS DESIGNED FOR MOUNTING TO 19" UNIVERSAL RACKS.
- FOUR (4) 12-24 X 1/2" ROUND HEAD SCREWS AND (4) METRIC M6x1x15MM SCREWS ARE PROVIDED FOR FASTENING TO RACKS.
- DIMENSIONS IN PARENTHESES ARE IN METRIC.
- USE 110 STYLE TERMINATION TOOL FOR PUNCH DOWN.
- RETENTION CAPS (ONE PER CONNECTOR) PROVIDED FOR SNAP-IN ON TERMINATED CONNECTORS.

MODEL FILENAME	MO2088AA_1RU_24PORT_PANEL_ASSY_06	SIZE	A
DRAWING FILENAME	MO2479JN_DC250_00A		

TITLE  
**NETKEY CAT5e 24 PORT PATCH PANEL CUSTOMER DRAWING**

<b>PANDUIT</b> ™ CORP. TINLEY PARK, IL 60477	I.I. NUMBER
	PRODUCT SPEC

THIRD ANGLE PROJECTION	ALL DIMENSIONS ARE GIVEN IN INCHES, UNLESS OTHERWISE SPECIFIED. DIMENSIONAL TOLERANCES ARE: (.X) ± .03    (.XXX) ± .005 (.XX) ± .01    ANGLES ± 1°	WORK INSTRUCTION
		SCALE

DRAWN BY	REVIEW DRAWING NUMBERS	PART NO.
LZ		SEE CHART
DATE		DRAWING NO.
3-4-06		02479-250
CHK'D		

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH
R	3-4-06	LZ		RELEASED TO PRODUCTION	02479-250				