




THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

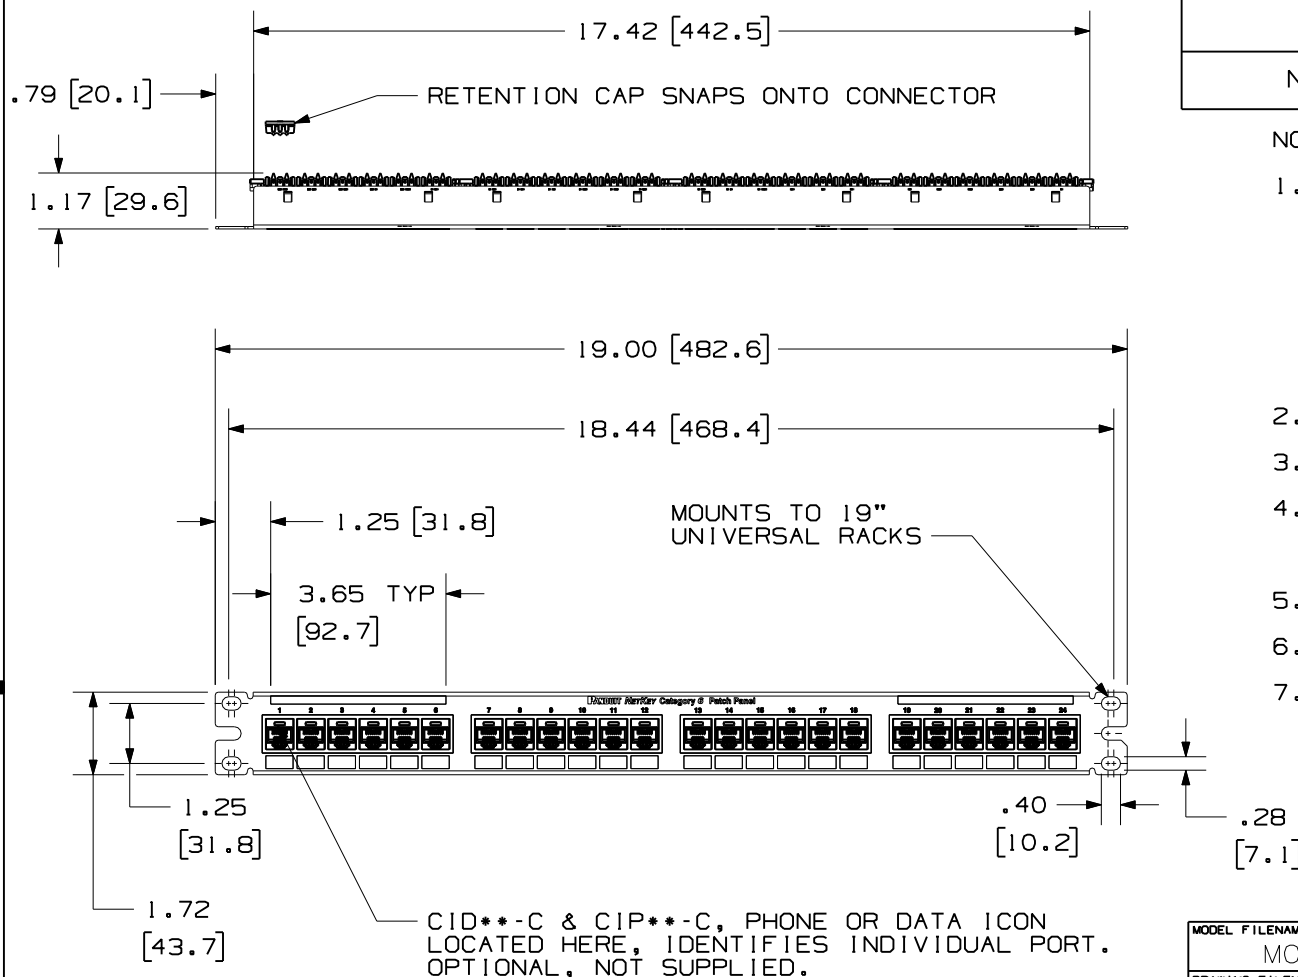

PANDUIT PART NO.	WEIGHT (APPROX.)
NK6PPG24Y	1.25 lb (567 g)

NOTES:

- MATERIAL:
 PANEL HOUSING: STEEL
 RJ45 MODULE: THERMOPLASTIC RESIN UL94V-0
 PUNCHDOWN BLOCKS: THERMOPLASTIC RESIN UL94V-0
 BEZEL ASSEMBLY: THERMOPLASTIC RESIN UL94H-B
 RETENTION CAP: THERMOPLASTIC RESIN UL94V-0
- 24 PORT PATCH PANEL 8 POSITION 8 WIRE.
- THE PATCH PANEL IS DESIGNED FOR MOUNTING TO 19" UNIVERSAL RACKS.
- FOUR (4) 12-24 X 1/2" ROUND HEAD SCREWS AND (4) METRIC M6x1x15MM SCREWS ARE PROVIDED FOR FASTENING TO RACKS.
- DIMENSIONS IN PARENTHESES ARE IN METRIC.
- USE 110 STYLE TERMINATION TOOL FOR PUNCH DOWN.
- RETENTION CAPS (ONE PER CONNECTOR) PROVIDED FOR SNAP-IN ON TERMINATED CONNECTORS.

MODEL FILENAME M02088AA_1RU_24PORT_PANEL_ASSY_06	SIZE A
DRAWING FILENAME M02479JL_DC248_00A	
TITLE NETKEY CAT6 24 PORT PATCH PANEL CUSTOMER DRAWING	
 PANDUIT ™ CORP. TINLEY PARK, IL 60477	I.I. NUMBER
	PRODUCT SPEC
 THIRD ANGLE PROJECTION	WORK INSTRUCTION
ALL DIMENSIONS ARE GIVEN IN INCHES, UNLESS OTHERWISE SPECIFIED. DIMENSIONAL TOLERANCES ARE: (.X) ± .03 (.XXX) ± .005 (.XX) ± .01 ANGLES ± 1°	SCALE .25:1
DRAWN BY LZ	REVIEW DRAWING NUMBERS
DATE 3-4-06	PART NO. SEE CHART
CHK'D	DRAWING NO. 02479-248

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH
R	3-4-06	LZ		RELEASED TO PRODUCTION	02479-248				