


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

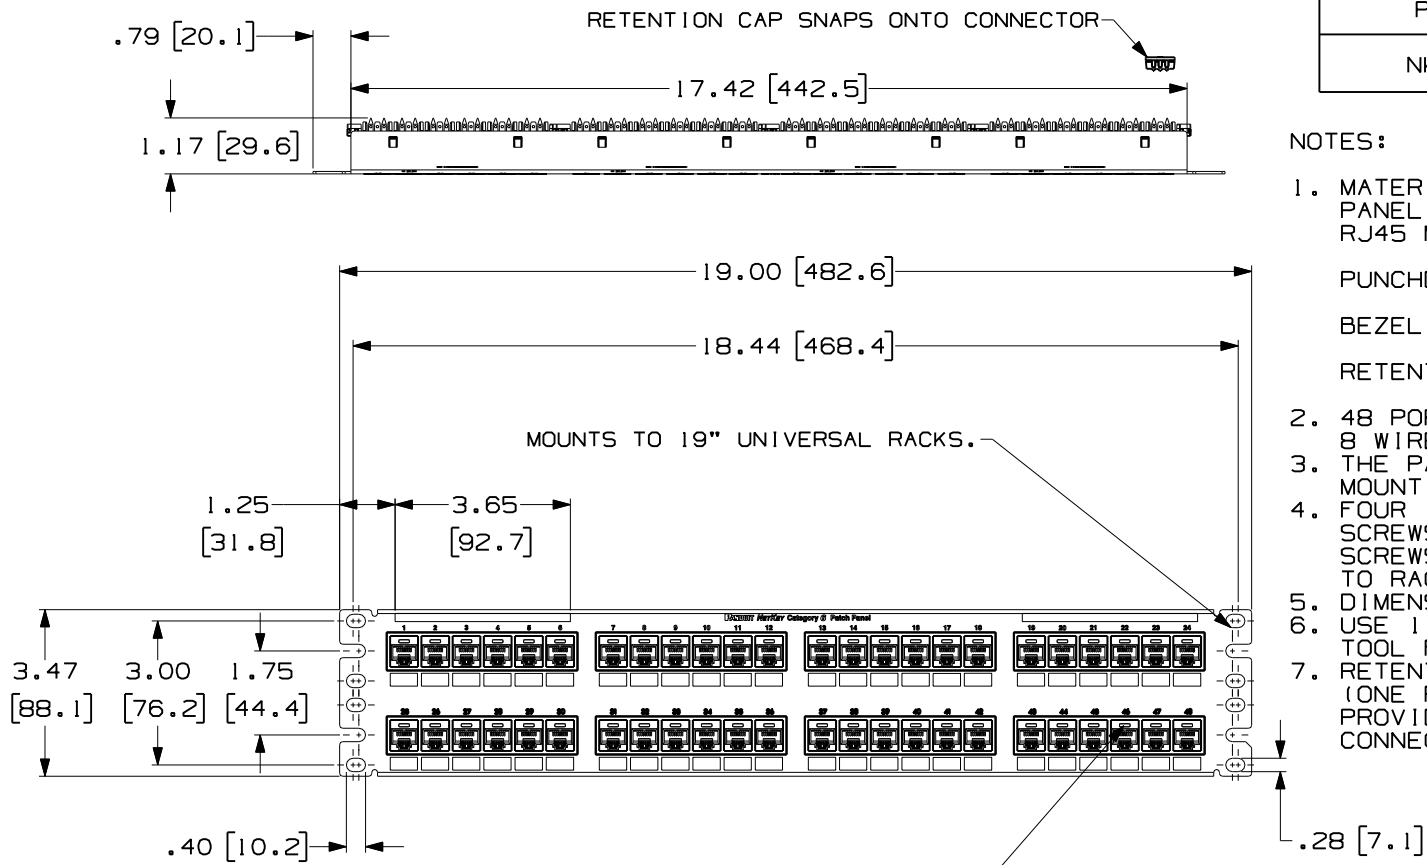

CID\*\*-C, PHONE OR DATA ICON LOCATED HERE, IDENTIFIES INDIVIDUAL PORT. OPTIONAL, NOT SUPPLIED.

| PANDUIT PART NO. | WEIGHT (APPOX.)  |
|------------------|------------------|
| NK6PPG48Y        | 2.2 lb (997.9 g) |

NOTES:

- MATERIAL:  
 PANEL HOUSING: STEEL  
 RJ45 MODULES: THERMOPLASTIC RESIN UL94V-0  
 PUNCHDOWN BLOCKS: THERMOPLASTIC RESIN UL94V-0  
 BEZEL ASSEMBLY: THERMOPLASTIC RESIN UL94H-B  
 RETENTION CAP: THERMOPLASTIC RESIN UL94V-0
- 48 PORT PATCH PANEL 8 POSITION 8 WIRE.
- THE PATCH PANEL IS DESIGNED FOR MOUNTING TO 19" UNIVERSAL RACKS.
- FOUR (4) 12-24 X 1/2" ROUND HEAD SCREWS AND (4) M6x1x15MM METRIC SCREWS ARE PROVIDED FOR FASTENING TO RACKS.
- DIMENSIONS IN BRACKETS ARE IN METRIC.
- USE 110 STYLE TERMINATION TOOL FOR PUNCHDOWN.
- RETENTION CAPS (ONE PER CONNECTOR) PROVIDED FOR SNAP-IN ON TERMINATED CONNECTORS.

|   |                          |
|---|--------------------------|
| MODEL FILENAME<br>M02088AB_2RU_48PORT_PANEL_ASSY_06       | SIZE<br>A                |
| DRAWING FILENAME<br>M02479JK_DC247_00A                    |                          |
| TITLE<br>NETKEY CAT6 48 PORT PATCH PANEL CUSTOMER DRAWING |                          |
| PANDUIT <sup>TM</sup> CORP.<br>TINLEY PARK, ILL 60477     | I.I. NUMBER              |
|   | PRODUCT SPEC             |
| THIRD ANGLE PROJECTION                                    | WORK INSTRUCTION         |
|   | SCALE<br>.25 TO 1        |
| DRAWN BY<br>LZ  | REVIEW DRAWING NUMBERS   |
| DATE<br>3-4-06  | PART NO.<br>SEE CHART    |
| CHK'D   | DRAWING NO.<br>02479-247 |

| REV | DATE   | BY | CHK | DESCRIPTION            | ECN       | R | CUST | SUP | OTH |
|-----|--------|----|-----|------------------------|-----------|---|------|-----|-----|
| R   | 3-4-06 | LZ |     | RELEASED TO PRODUCTION | 02479-247 |   |      |     |     |