

Step 1

Aligning the cover

Inside the cover there is a half round dark grey intumescent pad which has to be positioned directly over the can. Leave the beige colored area without padding directly over the junction box (see picture).



Step 2

Fitting the cover over the fixture hangers bars


Place the Tenmat FF109X cover over the fixture. Cut four small slits at the bottom of the cover just deep enough to fit over the hanger bars of the fixture and enable the cover to sit flush over the drywall or ceiling tile.



Step 3

Installing and wiring the light

Install the light following closely the manufacturer's instructions. The wire can be fed through the side of the cover closer to the junction box. Due to the nature of the product it is easy to poke the wire through the material or cut a small opening with a knife. Follow the light manufacturer's instructions to make proper connections.

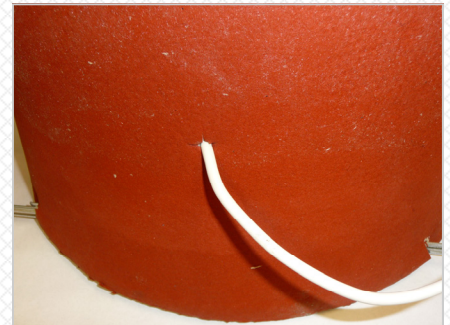

Step 4

Final check

Check for secure fit, and make sure the cover overhangs the hanger bars. The bottom of the FF 109X Cover should be in full contact with the back surface of the drywall board or ceiling tile.

